


## FEATURES

- High breakdown voltage and high current.  
 $BV_{CEO}=-80V, I_C=-1A$
- Good  $h_{FE}$  Linearity.
- Low  $V_{CE(sat)}$ .
- Complements the 2SD1898.

**HF**

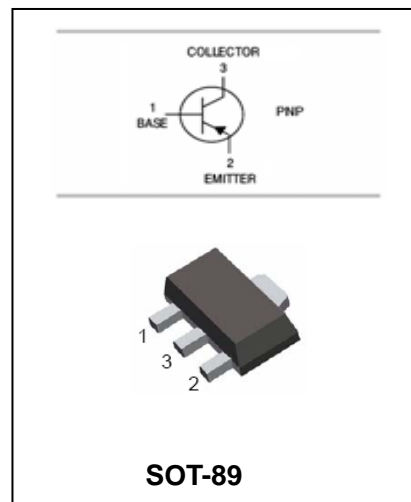

## APPLICATIONS

- Epitaxial planar type PNP silicon transistor

## MAXIMUM RATING @ Ta=25°C unless otherwise specified

Symbol	Parameter	Value	Unit
$V_{CBO}$	Collector-Base Voltage	-80	V
$V_{CEO}$	Collector-Emitter Voltage	-80	V
$V_{EBO}$	Emitter-Base Voltage	-5	V
$I_C$	Collector Current –DC -Pulse	-1 -2	A
$P_c$	Collector power Dissipation	0.5	W
$T_j$	Junction Temperature	150	°C
$T_{stg}$	Storage Temperature	-55 to +150	°C

\*1: When mounted on a 40\*40\*0.7mm ceramic board.

**ELECTRICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified**

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C = -50\mu A$ $I_E = 0$	-80			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C = -1mA$ $I_B = 0$	-80			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E = -50\mu A$ $I_C = 0$	-5			V
Collector cut-off current	$I_{CBO}$	$V_{CB} = -60V$ $I_E = 0$			-1	$\mu A$
Emitter cut-off current	$I_{EBO}$	$V_{EB} = -4V$ , $I_C = 0$			-1	$\mu A$
DC current gain	$h_{FE}$	$V_{CE} = -3V$ $I_C = -0.1A$	120		390	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = -500mA$ $I_B = -50mA$			-0.4	V
Output Capacitance	$C_{obo}$	$V_{CB} = -10V$ $f = 1.0MHz$ $I_E = 0$	-	20		pF

**CLASSIFICATION  $h_{FE}$** 

Rank	Q	R
Range	120-270	180-390

## TYPICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified

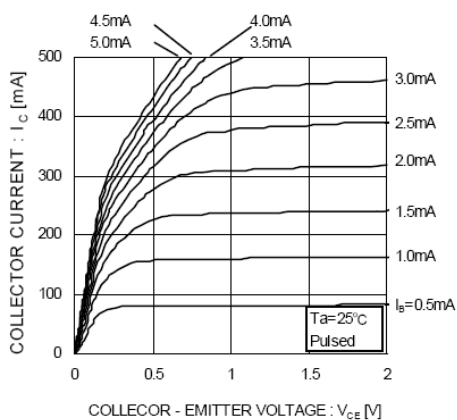


Fig.1 Ground Emitter Output Characteristics

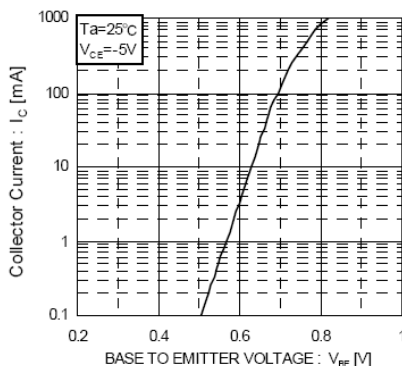


Fig.2 Grounded Emitter Propagation Characteristics

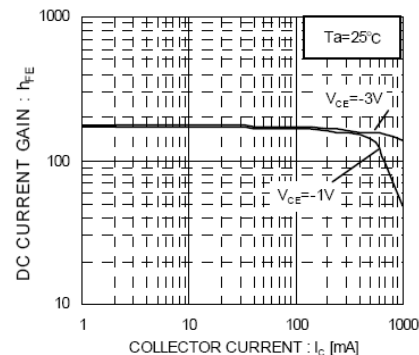


Fig.3 DC Current Gain vs Collector Current

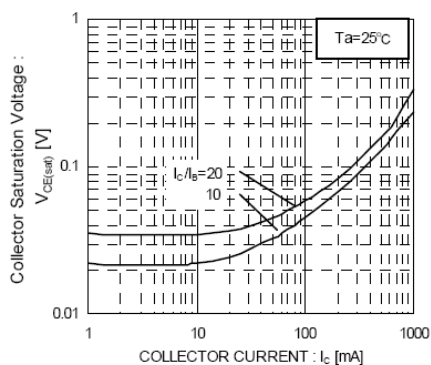


Fig.4 Collector-Emitter Saturation Voltage vs Collector Current

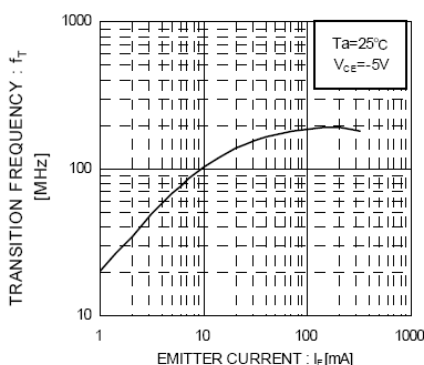


Fig.5 Transition Frequency vs Emitter Current


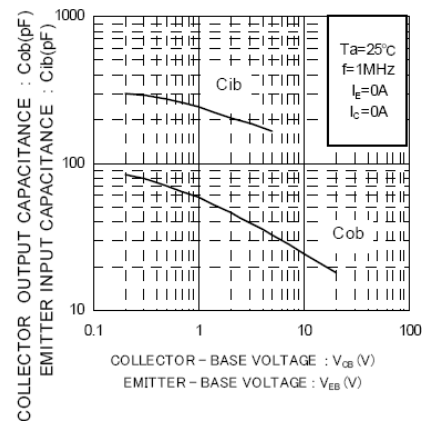


Fig.6 Emitter Input Capacitance vs. Emitter-Base Voltage  
Collector Output Capacitance vs. Collector-Base


## PACKAGE OUTLINE

Plastic surface mounted package

SOT-89

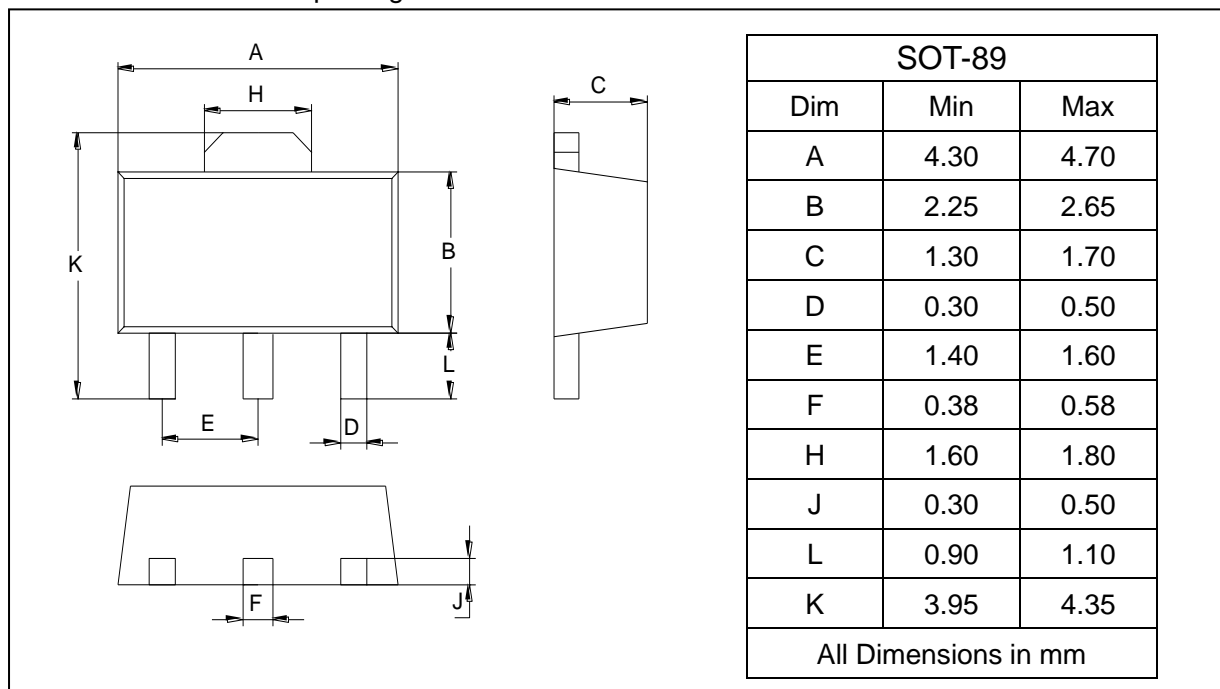

## SOLDERING FOOTPRINT

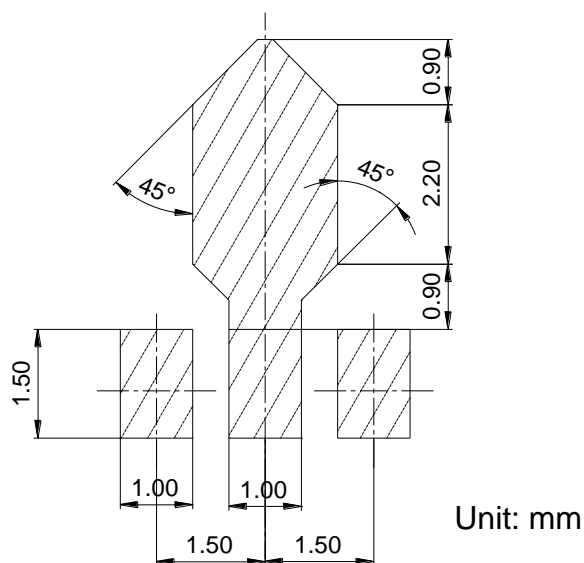

## PACKAGE INFORMATION

Device	Package	Shipping
2SB1260	SOT-89	1000 pcs / Tape & Reel